

Z958

2MP Outdoor Speed Dome with D/N, Adaptive IR, Extreme WDR, ELLS, 16x



- 2 Megapixel
- Day & Night with Extreme Low Light Sensitivity and Adaptive IR LED
- Extreme WDR (140dB)
- Endless Pan & Tilt, PTZ Auto Tracking
- Event trigger, response and notification
- Bundled wall mount (PMAx-0322)

► Specifications

Device

| | |
|--------------------------|--|
| Product Type | Speed Dome |
| Maximum Resolution | 2MP |
| Application Environment | Outdoor |
| Image Sensor | Progressive Scan CMOS |
| Sensor Size | 1/2.8 " |
| Day / Night | Yes |
| Low Light Sensitivity | Extreme |
| Minimum Illumination | Color: 0.002 lux at F1.7 (AGC on); B/W: 0 lux (IR LED on) |
| Mechanical IR Cut Filter | Yes |
| IR LED | Adaptive IR LED x 6 (850 nm) |
| IR Working Distance | 120m |
| Electronic Shutter | 1-1/100000 second (manual mode); 1-1/100000 second (auto mode) |
| S/N Ratio | 75 dB |

Lens

| | |
|--------------|-----------------|
| Focal Length | Zoom, f5.0-80mm |
|--------------|-----------------|

| | |
|--------------------------|------------------|
| Aperture | F1.7-F2.8 |
| Zoom Ratio | 16x optical zoom |
| Iris | Adaptive iris |
| Focus | Auto focus |
| Lens Mount | Board mount |
| Horizontal Viewing Angle | 51.7° - 4.89° |
| Vertical Viewing Angle | 30.49° - 2.75° |

PTZ

| | |
|--------------------------------|---|
| Manual Panning / Tilting Speed | 0.1° - 80°/second, 0.1° - 80°/second |
| Preset Panning / Tilting Speed | 80°/second, 80°/second |
| Panning Range | 360° endless |
| Tilting Range | -15°~90° (with E-flip) |
| PTZ Control | Remote manual control, Speed Control, Drag to Pan and Tilt, 1024 preset points, 16 preset tours |
| Absolute Position | Yes |

Video

| | |
|-----------------------------------|--|
| Compression | H.265 Adaptive Stream (equivalent to Zip or Smart Stream or H.265+), H.264, MJPEG |
| Maximum Frame Rate vs. Resolution | 30 fps at 1920 x 1080 30 fps at 1280 x 720 30 fps at 720 x 576 30 fps at 640 x 360 |
| Multi-Streaming | Simultaneous triple streams |
| Wide Dynamic Range | Extreme WDR (140 dB) |
| Image Enhancement | White Balance, Backlight compensation (BLC), Highlight compensation (HLC), Automatic exposure, Brightness, Sharpness, Defogging |
| Digital Noise Reduction | 2D + 3D DNR |
| Privacy Mask | 4 configurable regions |
| Text Overlay | Yes |
| Built-in Analytics | People Detection, Vehicle Detection, People Counting, Crowd Detection, Tampering Detection, PTZ Auto Tracking, Object Line Crossing Detection, Object Enter Area Detection, Object Exit Area Detection, Missing Object Detection, Intrusion Detection (Forbidden Area Detection) |
| Image Orientation | Flip, Mirror, Rotation (Corridor mode)(±90°, 180°) |

Network

| | |
|----------------------------|--|
| Network Protocol & Service | IPv4, TCP, UDP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, NTP, RTP, RTSP, RTCP, RTMP, SMTP, FTP, IGMP, ICMP, ARP, UPnP, QoS, SSL/TLS, SNMP, IEEE 802.1X |
| Ethernet Port | 1 x Ethernet (10/100 Base-T), RJ-45 connector |
| Security | IP address filtering, HTTPS encryption, Password protected user level, IEEE 802.1X network access control |

Event

| | |
|---------------|--|
| Event Trigger | Video motion detection (4 regions), Video loss |
|---------------|--|

Event Response

Notify control center, Go to PTZ preset point or preset tour, E-mail notification with snapshots, Save video or snapshot to storage, Upload snapshot to FTP server

Integration

| | |
|-----------------|--|
| Edge Recording | Support (integration with NVR by ONVIF Profile G)* |
| ONVIF Compliant | Yes, Profile S, Profile G, Profile T |
| Web Browser | IE 11, Google Chrome, Microsoft Edge, Firefox |


Interface

| | |
|------------------|--------------|
| Operating Button | Reset Button |
|------------------|--------------|

General

| | |
|-----------------------|--|
| Power Source | DC 12V, High PoE (IEEE802.3at) |
| Power Consumption | 20 W (PoE) |
| Dimensions | (Ø x H): 162mm x 293mm (6.4" x 11.5") |
| Environmental Casing | Weatherproof (IP66), Vandal proof metal casing (IK10) |
| Corrosion Protection | Optional for project request. Chassis corrosion resistance at the seashore approximately 2-3 years. |
| Bundled Accessories | Power Adapter |
| Mount Type | Pendant |
| Operating Temperature | -40°C ~ 65°C (-40°F ~ 149°F) |
| Surge Protection | 6KV |
| Approvals | CE Class B, FCC Class B, IP66, IK10 (metal casing), UL Listed |
| Real-time Clock (RTC) | Yes |
| Warranty | 2 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty |



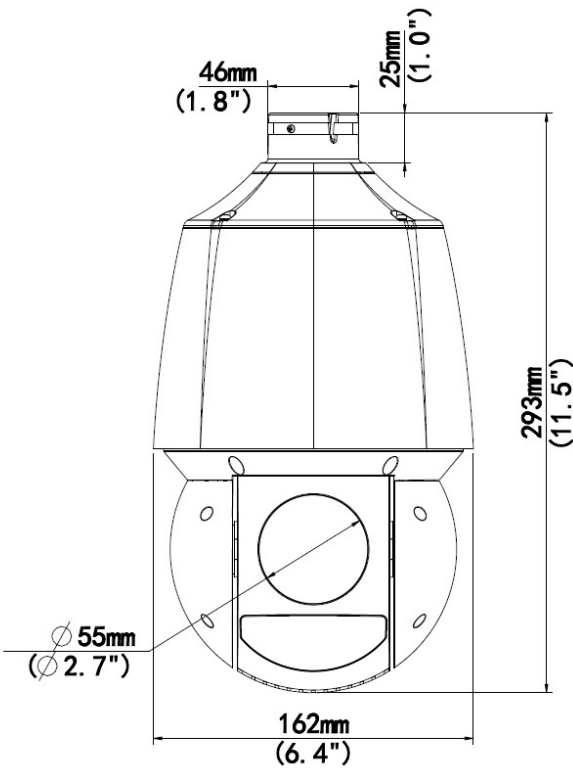




► Dimension Diagram



Unit: mm [inch]

► Related Products

Mounting Accessories - Camera Mount

| | | |
|-----------|---|---|
| PMAX-0104 |  | Extension Tube |
| PMAX-0115 |  | Pendant Mount (for A950, A951, A952, A956, Z950, Z952) |
| PMAX-0116 |  | Straight Tube, 200 mm (for Z950) |
| PMAX-0117 |  | Straight Tube (for Z950, Z952) |
| PMAX-0126 |  | Straight Tube with Bracket and Converter Ring (for Q75) |
| PMAX-0322 |  | Wall mount (for Z950, Z952) |
| PMAX-0343 |  | Gooseneck with Bracket with Converter Ring (for Q75) |

PMAX-0344



Gooseneck with Converter Ring (for Q75)

PMAX-0346



Heavy Duty Wall Mount with Converter Ring (for Q75, A950, A951, A952, A956)

PMAX-0358



Parapet Wall Mount (for Z95X, Q84)

PMAX-0402



Corner Mount

PMAX-0404



Corner Mount (for Z950, Z952)

PMAX-0503



Pole Mount (for PMA-0102, PMA-0312, PMA-0313, PMA-0314, PMA-0702, PMA-1106, PMA-1107), supports 5.25" to 8.5" Poles

PMAX-0513



Pole Mount (for Z950, Z952)

PMAX-0702



Junction Box for PTZ and Dome Cameras

PMAX-0711



Junction box (for Z950, Z952)

PMAX-0807



Gangbox Converter (for PMA-0102, PMA-0312, PMA-0313, PMA-0314, PMA-0321), supports Two-Gang Boxes

PMAX-1403



Ceiling Mount (for Z950, Z952)

Note: Some mounting accessories may need additional accessories for installation. Please check www.acti.com/mountingselector for more information.

Power Supply Accessories - PoE Injector

PPOE-0107



High PoE Injector IEEE 802.3at compliant, AC 100~240V, with universal connectors (for A416, A418, B913, B923, B934, Q450, Q75, VMGB-60X, Z37, Z71, Z952)