

V32



- Rack Space: 1U
- 16 X CVBS, BNC connector
- Web Client, Mobile Client
- Event trigger, response and notification

► Specifications

Device

Product Type	Rackmount Video Encoder
Maximum Number of Cameras	16

PTZ

PTZ Control	Remote manual control, 32 preset points
Pan, Tilt or Zoom protocol	Pelco-D, Pelco-P V2, Dynacolor

Video

Compression	H.264 (Baseline/ Main/ High profile), MJPEG
Maximum Frame Rate vs. Resolution	30 fps at 960 x 480 25 fps at 960 x 576 30 fps at 720 x 480 25 fps at 720 x 576 30 fps at 640 x 480 30 fps at 320 x 240
Multi-Streaming	Simultaneous dual streams
Bit Rate	28Kbps - 6Mbps
Bit Rate Mode	Constant, Variable
Image Enhancement	Brightness, Saturation, Contrast, Sharpness
Privacy Mask	4 configurable regions
Text Overlay	Yes

Server-based Analytics	Object Based Motion Detection, Tamper, People Counting, Object Line Crossing Detection, Object Enter Area Detection, Missing Object Detection, Unattended Object Detection, Crowd Detection, Vehicle Counting, Heat Map, Automatic License Plate Recognition, Vehicle Speed Detection, Direction Detection, (Require PC-based or standalone IVS or ALPR Server. Contact ACTi support for recommendations on how to maximize analytical accuracy)
Image Orientation	Flip, Mirror

Audio

Audio Type	2-way, Line-in, Line-out
Audio Compression	8 kHz, Mono, PCM, 16 bit encoding, G.711

Network

Network Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv4/v6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour, IEEE 802.1X
Ethernet Port	1 x RJ-45 connector
Security	IP address filtering, HTTPS encryption, Password protected user level, IEEE 802.1X network access control, Anonymous login

Event

Event Trigger	Video motion detection (3 regions), External device through digital input, Sound detection, Video loss, Video Recovery, Scheduler, Storage removed, Failed to write storage, System is going to reboot, System booted successfully,
Event Response	Notify control center, Go to PTZ preset point or preset tour, Change camera settings, Command other devices, E-mail notification with snapshots, Save video or snapshot to storage, Upload video or snapshot to FTP server, Activate external device through digital output, Change motion detection profile

System

Client PC Operating System	Windows 10, Windows 11
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, iPad, Android device

Integration

Unified Solution	Fully compatible with ACTi software
Software Development Kit	Yes
GPS Position	Manual setting
ONVIF Compliant	Yes, Profile S
Web Browser	IE 11, Google Chrome, Microsoft Edge, Apple Safari

Interface

Serial Port	2, RS-485/RS-422, Terminal block
Audio Interface	16/1, Terminal block
Analog Video Input	16 X CVBS, BNC connector
Digital Input/Output	16 (DI/DO configurable), Terminal block

General

Power Source	AC 100-240V
Power Consumption	9.36 W (AC)


Weight	1886g (4.16lb)
Dimensions	Rack Space: 1U (W x H x D): 444mm x 44.5mm x 142mm (17.5" x 1.8" x 5.6")
Mount Type	Rack mounts
Fan	Yes
Starting Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Operating Humidity	10% - 85% RH, non-condensing
Remote Access	Web Client, Mobile Client
Approvals	CE Class B, FCC Class B, UL Listed (UL 62368-1), CB, IEC 60950-1:2005
Real-time Clock (RTC)	Yes
Warranty	3 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

► Photo Indication



- | | |
|----------------------|--|
| 1 Power LED | 7 Ethernet Port |
| 2 Serial Port LED | 8 AC Power Input |
| 3 LAN LEDs | 9 Power Switch |
| 4 Memory Card Slot | 10 Audio Input / Output & Digital Input / Output |
| 5 Analog Video Input | 11 Serial Port |
| 6 Reset Button | |

► Dimension Diagram

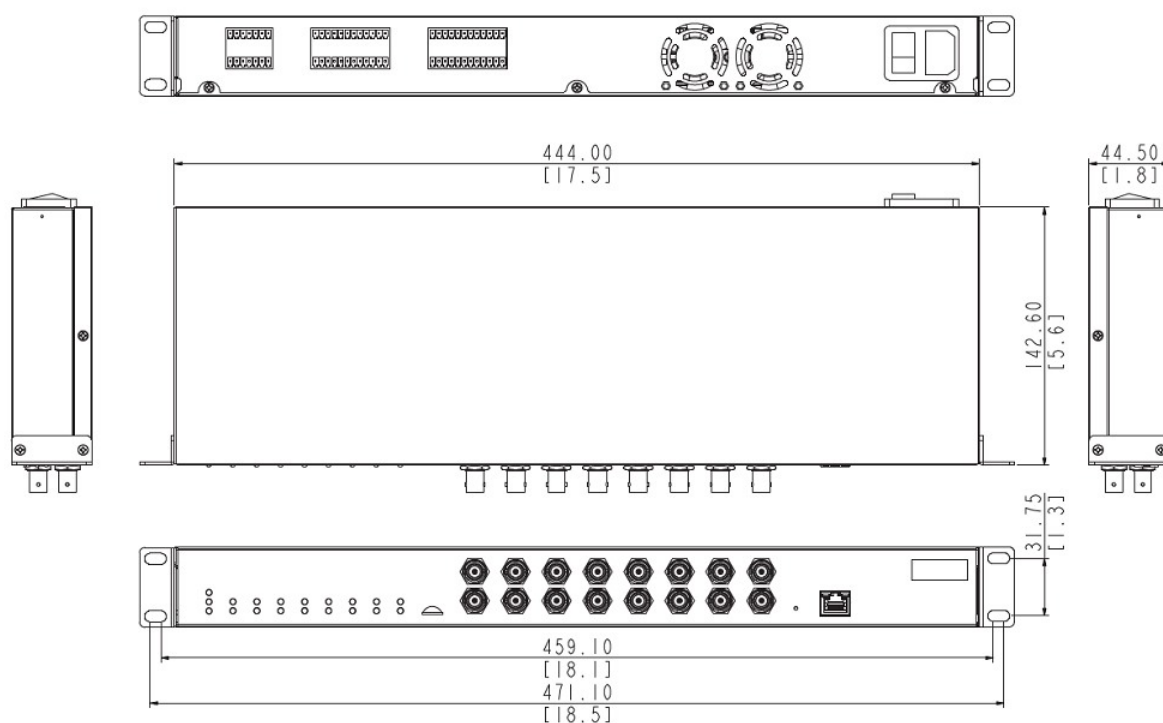

Unit: mm [inch]

▶ **Related Products**

Audio Devices - Microphone

PMIC-0100



Active Microphone Omnidirectional for all Cameras with Line-in Audio

